

ROOF ANCHOR

ROOFSAFE™ ZORBA™ *Tech* ANCHOR

ULTIMATE
PROTECTION FOR
BOTH USER AND
ROOF STRUCTURE
QUICK AND EASY
TO INSTALL



A single fixing anchor for
concrete roofs with an
innovative energy absorber.



THE ULTIMATE IN FALL PROTECTION


ROOF ANCHOR

FEATURES AND BENEFITS

- Energy absorber on the top of the anchor that reduces the forces back to the roof to less than 10kN, reducing damage to the structure of the roof. Forces are lower than any other single fixing roof anchor on the market.
- Easy and quick to install with single fixing point reducing the labour cost associated with installing a roof fall arrest system.
- Concrete fixing is secured in place with a torque set expansion anchor which ensures that anchors are always safely installed.
- The weather shroud ensures no water ingress into the building.
- Certified to EN795 2012 Class A for a single user and conforms to CEN / TS 16415 for 2 users plus a rescuer.
- Available in 3 heights to suit different heights of insulation. Suitable for warm and cold roofs.




Deployed Anchor tested to CEN / TS 16415 for 2 users

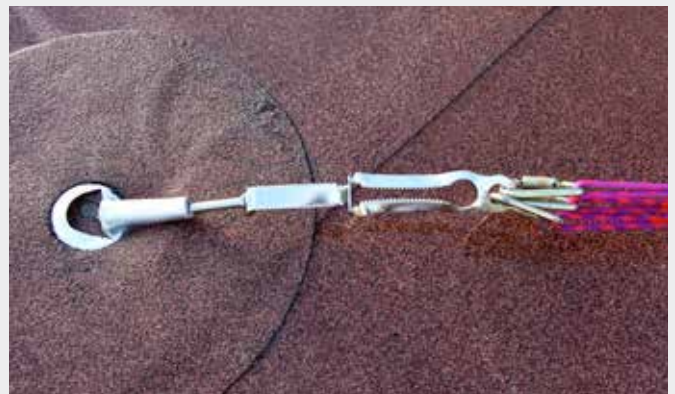


Deployed Anchor tested to CEN / TS 16415 for a 3rd user (rescuer) falling on an anchor that was deployed

GRAPH SHOWING PEAK LOADS

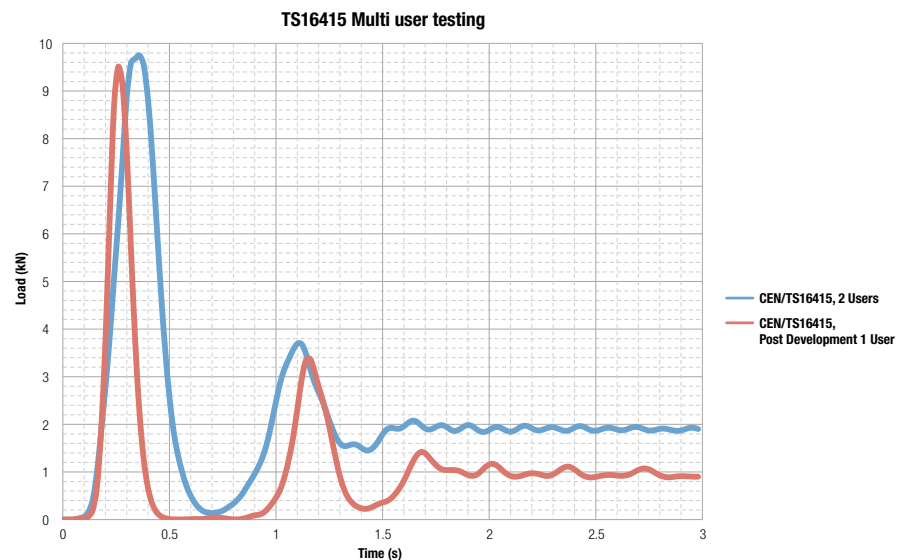

ANCHOR OPTIONS AND TECHNICAL SPECIFICATIONS

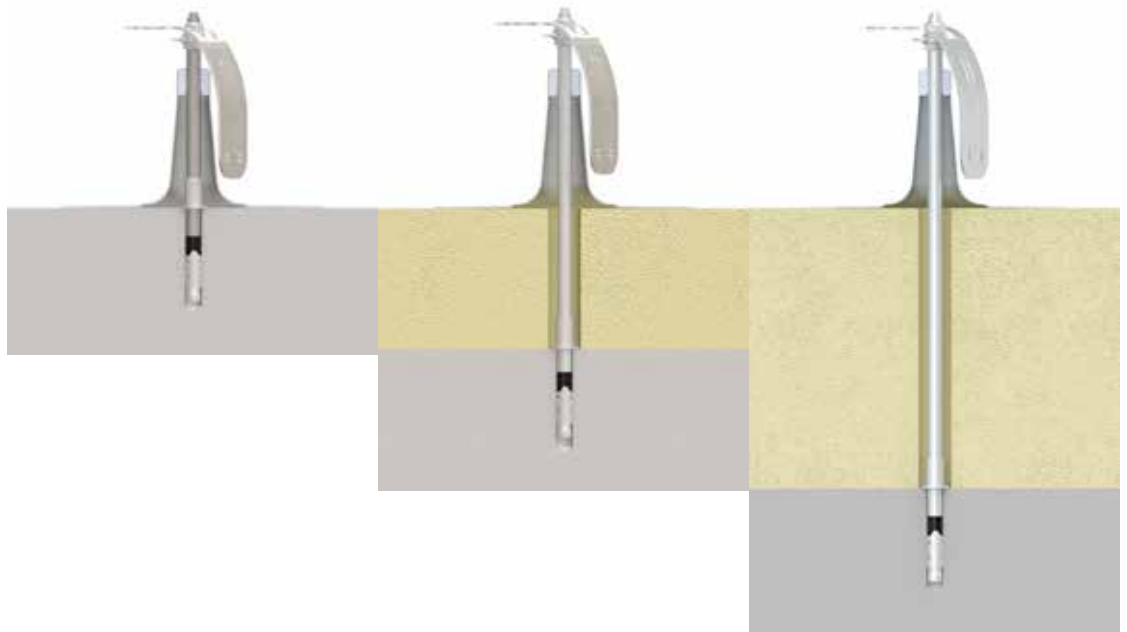

Part No.	7241284	7241285	7241286
Design for insulation thickness of	0mm	≤ 150mm	≤ 300mm
Weight	1kg	1.19kg	1.43kg
Total height of anchor	310mm	460mm	610mm
Height of attachment point of anchor above roof surface	195mm	195mm	195mm
No. of users	 + 	 + 	 + 
Materials	304 stainless steel	304 stainless steel	304 stainless steel
Suitable for roof type	Solid concrete (Min C20/25) >115mm	Solid concrete (Min C20/25) >115mm	Solid concrete (Min C20/25) >115mm

WEATHER DETAIL OPTIONS



Part No.	7241283	7241282
Weight	0.33kg	0.33kg
Suitable for coverings	Bitumen EPDM, TPO	PVC
Materials	Aluminium & EPDM	Aluminium & EPDM (PVC coated)

RECOMMENDED DBI-SALA® ACCESSORIES

Only devices approved by DBI-SALA® should be used on the RoofSafe™ ZORBA™ Tech anchor.

This ensures the safety of your workforce, as many devices are not tested in conjunction with cable fall protection systems.

Your system integrator will advise you further on your equipment selection, including harnesses and training for your personnel for working safely at height.

**EZ-Stop™
Edge Tested
Rope Lanyard
(1245553)**



**Delta™
Harness
(1112915)**



Capital Safety Group, EMEA

5a Merse Road, North Moons Moat,
Redditch, Worcestershire B98 9HL
t: +44 (0) 1527 548 000
f: +44 (0) 1527 591 000

www.capitalsafety.com

Le Broc Center, Z.I. 1ère avenue, BP 15
06511 Carros le Broc Cedex France
t: +33 (0)497 100 010
f: +33 (0)493 087 970